



Ontario

# WATER WELL RECORD

31D/0W

1. PRINT ONLY IN SPACES PROVIDED  
2. CHECK  CORRECT BOX WHERE APPLICABLE

6407027

MUNICIPALITY: 64004 CPN

CON. BLOCK TRACT SURVEY, ETC. 01

COUNTY OR DISTRICT: **Victoria** TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE: **Digby** CON. BLOCK TRACT SURVEY, ETC.: **1**

DATE COMPLETED: DAY **17** MONTH **09** YEAR **76**

ADDRESS: **Pine St. N. Timmins, Ont. P4N 6L4**

GRID COORDINATES: 56460 5 10895 6 2

### LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
Grey	Clay		dry	0	1'
Grey	Limestone		soft	1'	20'
Red	Limestone		soft	20'	80'
Grey	Granite		soft	80'	97'

31 000120568 002021585 00801 185 0077 2185

32

41 WATER RECORD

DEPT. FOUND AT - FEET	KIND OF WATER
10-13	<input checked="" type="checkbox"/> FRESH <input type="checkbox"/> SALTY <input type="checkbox"/> SULPHUR <input type="checkbox"/> MINERAL
15-18	<input type="checkbox"/> FRESH <input type="checkbox"/> SALTY <input type="checkbox"/> SULPHUR <input type="checkbox"/> MINERAL
20-23	<input type="checkbox"/> FRESH <input type="checkbox"/> SALTY <input type="checkbox"/> SULPHUR <input type="checkbox"/> MINERAL
25-28	<input type="checkbox"/> FRESH <input type="checkbox"/> SALTY <input type="checkbox"/> SULPHUR <input type="checkbox"/> MINERAL
30-33	<input type="checkbox"/> FRESH <input type="checkbox"/> SALTY <input type="checkbox"/> SULPHUR <input type="checkbox"/> MINERAL

51 CASING & OPEN HOLE RECORD

DEPT. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	
			FROM	TO
05	<input checked="" type="checkbox"/> STEEL <input type="checkbox"/> GALVANIZED <input type="checkbox"/> CONCRETE <input type="checkbox"/> OPEN HOLE	1/2	0	0011'
17-18	<input type="checkbox"/> STEEL <input type="checkbox"/> GALVANIZED <input type="checkbox"/> CONCRETE <input type="checkbox"/> OPEN HOLE			20-23
24-25	<input type="checkbox"/> STEEL <input type="checkbox"/> GALVANIZED <input type="checkbox"/> CONCRETE <input type="checkbox"/> OPEN HOLE			27-30

SCREEN

SIZE OF OPENING (SLOT NO.)	DIAMETER	LENGTH
	INCHES	FEET
		41-44
		80

61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE	(CEMENT GROUT LEAD PACKER, ETC.)
10-13	14-17	
18-21	22-25	
26-29	30-33	80

71 PUMPING TEST METHOD

1  PUMP  BAILER

PUMPING RATE: 0010 GPM

DURATION OF PUMPING: 00 HOURS 00 MINS

WATER LEVELS DURING PUMPING:


15 MINUTES	30 MINUTES	45 MINUTES	60 MINUTES
043'	080'	080'	080'

PUMP INTAKE SET AT: 80'

RECOMMENDED PUMP TYPE:  DEEP

RECOMMENDED PUMP SETTING: 080'

RECOMMENDED PUMPING RATE: 2008 GPM

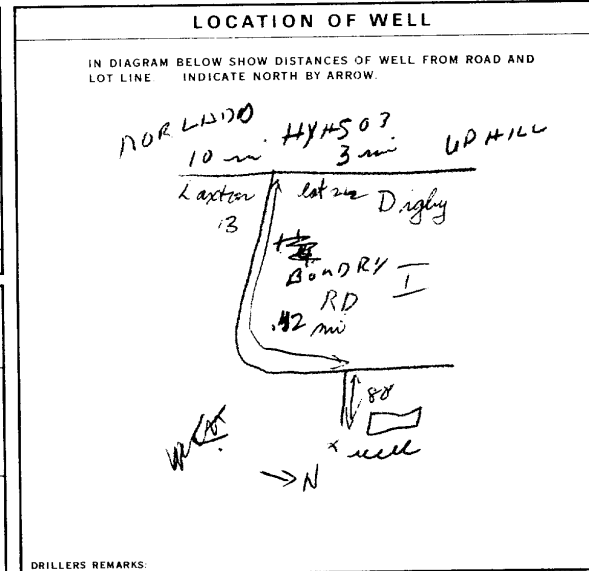

FINAL STATUS OF WELL:  WATER SUPPLY

WATER USE:  DOMESTIC

METHOD OF DRILLING:  AIR PERCUSSION

CONTRACTOR: F.C. Hammond Well Drilling Ltd 2512

ADDRESS: Box 592, Huntsville, Ont. POA 1K0

NAME OF DRILLER OR BORER: Ronald Clarke

SIGNATURE OF CONTRACTOR: F.C. Hammond Well Drilling Ltd

SUBMISSION DATE: DAY 8 MO 6 YR 77

OFFICE USE ONLY

DATA SOURCE: 25/2

CONTRACTOR: 130672

DATE OF INSPECTION: / /

INSPECTOR: P. James

REMARKS: WI